


TECHNICAL DATASHEET
RREC02 - 6m
Eco Ridge Roll

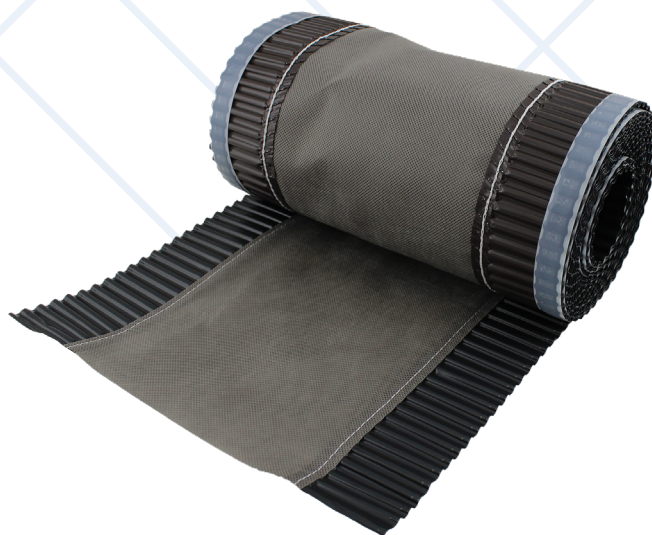

Product Details

Kytun™ Eco roll - this is the sealing-ventilation tape to be used on sloping and level roof ridges.

The PP geo-textile used in that kind of tape with UV stabilising up to 6 months is a very highly specialist raw material, which ensures double protection: water tightness and proper water vapour removal.

The central flat “spine” of the roll is reinforced for fixing to the ridge batten. The two corrugated side flaps are designed to drape down over the top row of tiles on either side as the roll is opened out. The underside has a strip of self-adhesive butyl protected by an easy-release backing tape.

Features & Benefits

| | |
|--------------------------|--------------------------------|
| Code: | RREC02 |
| Width: | 310mm |
| Airflow: | 5mm continuous at high level.* |
| Aluminium thickness: | 140 μ |
| UV stabilisation: | Yes |
| Material: | Polypropylene (PP) |
| Air permeability: | 280 g/m ² |
| Width butyl glue: | 15 mm + / - 1 mm |
| Thickness butyl glue: | 1.5 mm + / - 1 mm |
| Min. installation temp.: | + 5 ° C |
| Temp. resistance: | - 30 ° C to + 80 ° C |

* For most tiles it provides a continuous 5mm high level ventilation.